MALLORY Mallory Sonalert Products Inc.	Part # ASI09N27M-05TRQ
Sales Outline Drawing	Revision **E**

May not be suitable for all Medical and Aerospace applications.
Contact Mallory Sonalert to discuss your application.

Oscillation Frequency (Hz)	2700 ± 300
Operating Voltage (Vdc)	3.0 ~ 7.0
Rated Voltage (Vdc)	5.0
Current Consumption Max. (mA)	30 at Rated Voltage
Sound Pressure Level (dB/min)	80 at 10cm at Rated Voltage
Tone/Pulse Rate	Constant
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80
Lead Pin	SMD
Housing	PPS Plastic Resin (Black)
Weight (Grams)	2.5
Options	For other options contact factory

Dimensions: (units: mm)

ROHS Compliant

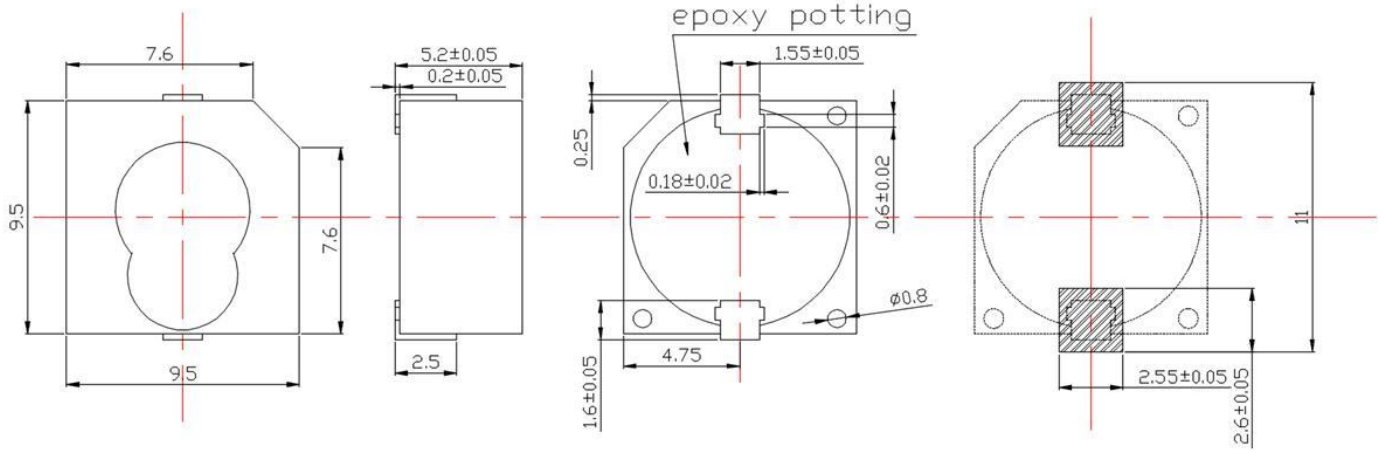

Packaging:

Parts are supplied on reels (600pcs per tape and reel).
Units come with wash label and are appropriate for aqueous wash.