



Mallory Sonalert Products, Inc.

Part #:

VAA02W05090-02

Sales Outline Drawing


Revision:

B

Specifications:

Product Type	Speaker/Housing Assembly
Input Power	1.0 Watts
Max Power	1.5 Watts for 1 min.
Lowest Resonant Freq	2000 Hz
Frequency Range	200 to 3000 Hz
Impedance	8 Ohms
Sound Level	90 dB(A) typ @ 2000 Hz @ 2.5Vp-p Square wave
Housing Material	6/6 Nylon, Color: Black
Storage Temperature	-20° to +60° C
Operating Temperature	-20° to +60° C
Panel Mounting	Recommended hole size is 1.25"(31.75mm). Thread front will fit standard 30mm(1.181") hole.
Knurled Nut	Used to attach part to panel. The max recommended torque is 10 in-lbs.
Weight (Typical)	1.5 oz (42g)
NEMA 3R,4X, & 12	Approved with use of ACC03.
Options	Please contact factory.

Dimensions: Inches (mm)

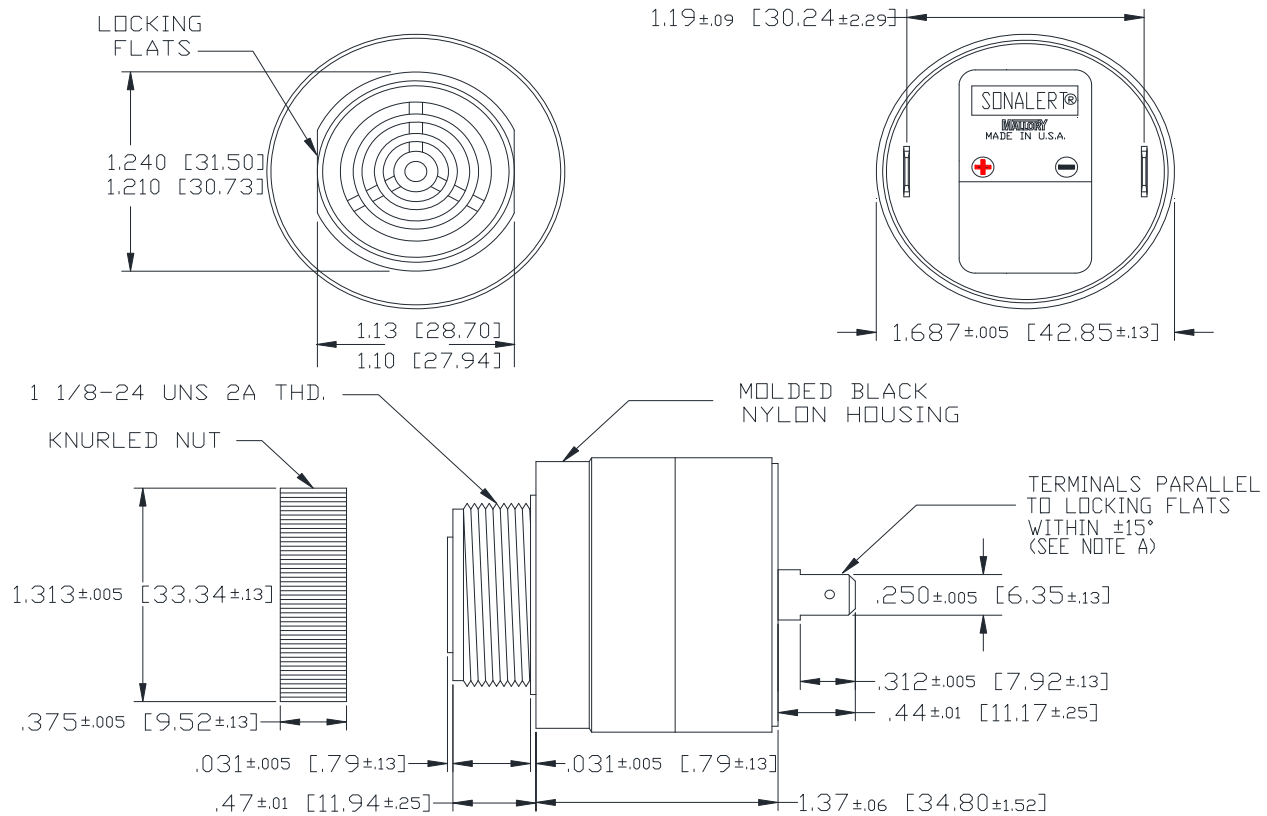

MOUNTING: REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.